

# Sutton Upon Derwent Drainage Improvements

## Introduction

Due to a high activity of regular flooding in the area, works have been proposed to help alleviate the flooding in the area. This is to be done via implementing a new outfall system connected to an overflow junction to take any backed-up water through a different pipe network out into an open watercourse and install new gullies to remove excess water that may pool on the carriageway, for more information see Figure B. Figure A below is the rough location of the works.



Figure A – Location Plan (Main Street, Sutton upon Derwent YO41 4BW)

## Scope

The scope of the project will consist of the following:

- Installation of overflow and outfall system as specified by design and specifications
- Installation of new gullies and carrier drain adjacent to Main Street, Sutton Upon Derwent
- Installation of new manholes for future drainage surveys

For more details see figure B below.

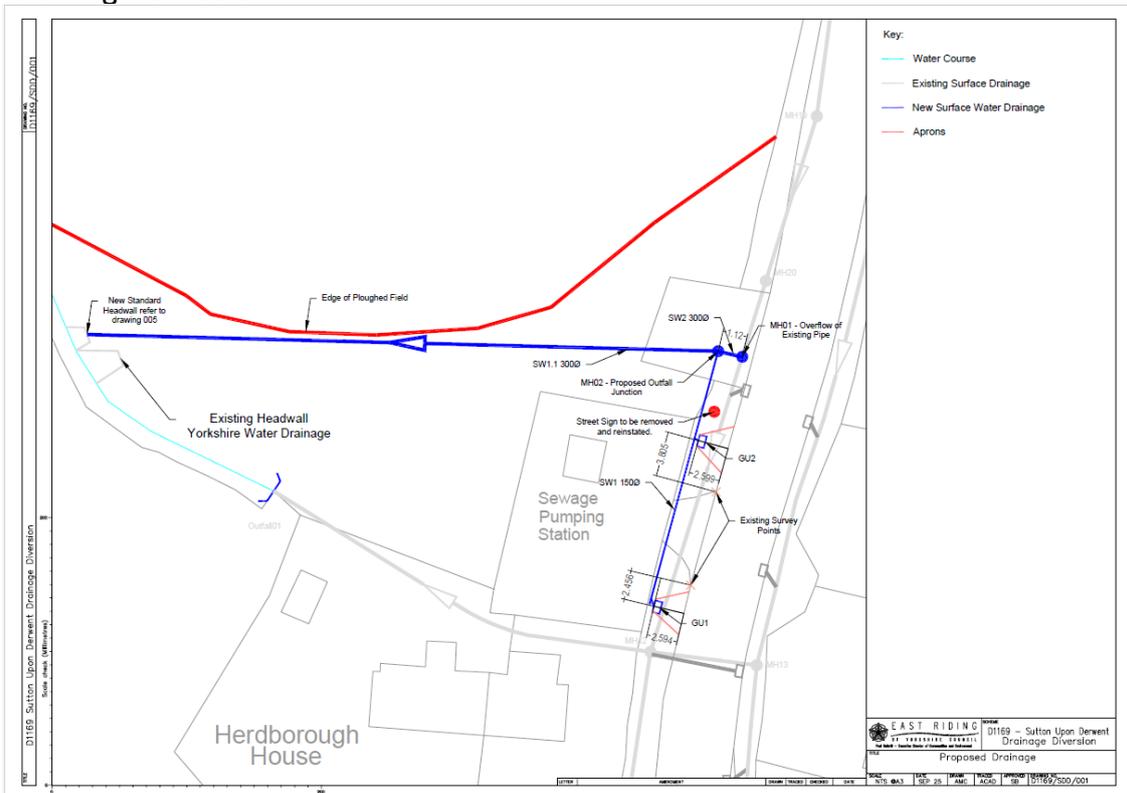


Figure B – Scheme Layout

## Programming

Works are scheduled to be carried out on 23rd March 2026 with planned traffic management to be set up during works commencement.